




Manfrotto

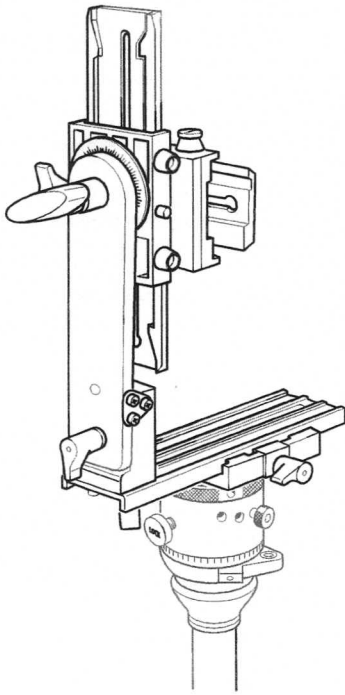

INSTRUCTIONS

303SPH

Introduction

The 338 Leveling Base is designed to support cameras or instruments and make fine, finger tip level adjustments of ± 5 degrees.

KEY FEATURES

- Spirit level with sensitivity of 0.5 degrees.
- Three thumb rings to find level adjustment.
- 3/8" screw mounting for camera/instrument.

SET UP INSTRUCTIONS 1

Mount on tripod via 3/8" female thread "A" on the bottom of the leveling base.


The mounting plate on Manfrotto tripods are equipped with 3 set screws "B" which clamp up against the head to ensure effective and secure locking.

In the event of the equipment that is to be mounted on the base covering the spirit level "F", carry out the leveling procedure prior to mounting the equipment.


USE 2

Using the spirit level, rotate the 3 thumb rings "G" until the bubble in the spirit level is within the black circle.

When the level is set, lock in position by rotating thumb rings "J" up against base disk "E".

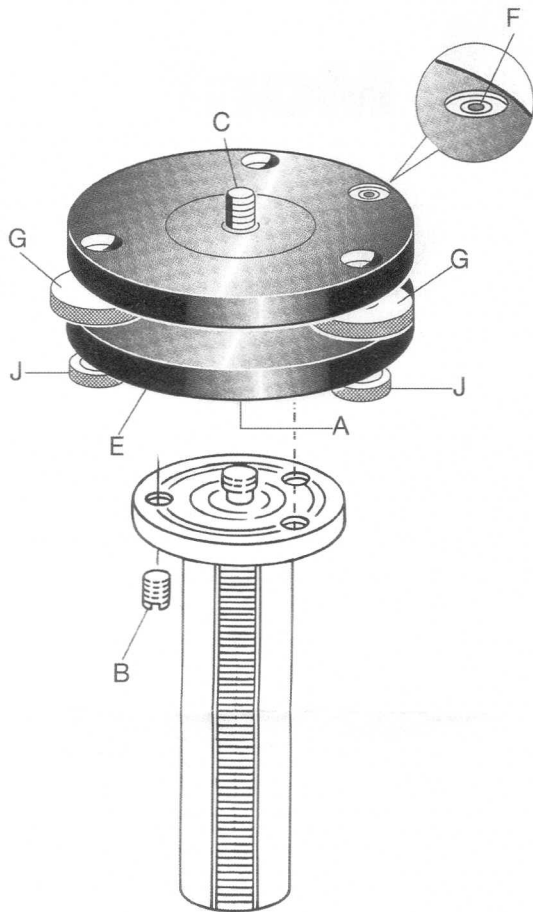

1

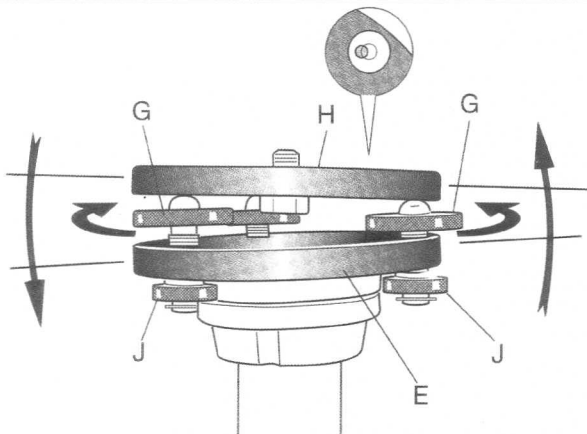


2

475 - 475B

PRO GEARED TRIPOD

- 1 The central geared column mechanism lever can be folded away during transportation.
- 2 Carrying strap attachment, levelling bubble, anti-slip geared column and locking knob system.
- 3 Mobile junction ring lockable in any position along the centre column for fast tripod set up.
- 4 Maximum legs angle positioning flexibility achieved by a mid level spreader independent brace system.
- 5 Quick action lever leg locks system with just 45° run.
- 6 Rubber feet with retractable spikes.

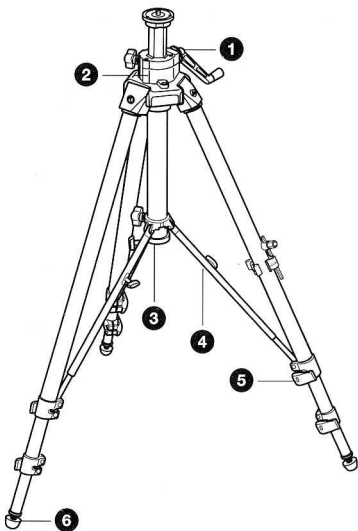

Manfrotto